

Systech IPG/7000 Series

Dial-to-IP Converters For Electronic Funds Transfer In ATM and Kiosk Applications

Introducing the perfect combination of cost savings, protection of investment, and revenue enhancement for IP-based ATM and Kiosk transactions.

Systech dial-to-IP converters permit ATMs and other POS payment devices to simply and efficiently re-route transactions via the Internet or private IP networks instead of dial up telephone lines.

Monthly recurring costs for phone lines may be eliminated in favor of a single, high-speed Internet or private IP connection. Costs per transaction may be lowered. Previous investments in ATMs may be maintained. Transaction times and download times may be reduced generating increased revenue and reduced costs of operation and maintenance.

Systech gateways are rapidly becoming the clear choice of leading payment processors, broadband suppliers, and ATM manufacturers and distributors. So contact your favorite supplier today, and accelerate your company's transition to IP-based savings!



Systech offers more than a dozen Dial-to-IP converters to cost-effectively address the complete range of EFT applications. ATM connections are made with RJ-11 telephone, DB-25 serial, or Ethernet interfaces.

- ***** ATM Dial to IP Conversion
- **❖** Private IP or SSL
- **❖** Split Dial Capability
- **❖** No Changes to ATM Applications
- **❖** SSL & 3DES Encryption
- **❖ POTS, Serial Port, Ethernet**Interfaces
- **❖** Dial Back-up Option



PO Box 701 Patton Ca 92369 Direct line 909 CASHLINE www.cashlineatm.com



Systech IPG/7000 Series

Technical Specifications



IP Protocol Support

IP HTTP Telnet TCP DHCP/BootP rTelnet

Security & Encryption

SSL 3DES

Remote Management & Diagnostics

Web-Browser Remote Interface Field Upgradeable Flash Remote & Local Diagnostics Pin-level Diagnostics & Remote Trace


Hardware Interfaces

10/100 Base-T Ethernet RJ45 802.3 RJ-11 POTS Line Interface DB-25 DCE/DTE Selectable Serial Interface Universal Locking Power Supply Status LED Indicators

Packaging & Environmental

Physical 6.3 x 5.75 x 2.1 inches Weight 1.25 Pounds CD-ROM configuration and documentation ESD Protection Operating Temp 0 to 50 degrees C Storage Temp –10 to 70 degrees C Humidity 10% to 90% non-condensing

Contact Cashline ATM: 800-796-4 ATM

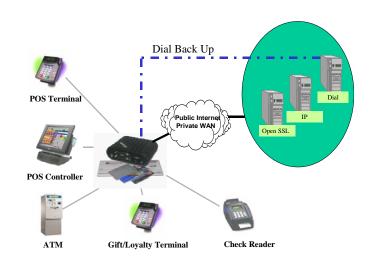

Selected Models & Configurations

POS Terminal	IPG-7110	1 RJ-11 Telephone Port
POS Terminal	IPG-7120	2 RJ-11 Telephone Ports
POS Terminal TO ED:	IPG-7540	4 RJ-11 Telephone Ports Dial Back-Up
Serial 1	IPG-7501	1 DB-25 Serial Modem Port Dial Back-Up
Serial 1 POS Terminal Serial 2 1 2	IPG-7522	2 RJ-11 Telephone Ports 2 DB-25 Serial/Modem Ports Dial Back-Up

Systech designs and markets dozens of models and configurations for ATM and Kiosk applications. Ask your reseller or a Systech representative to locate the model which best serves your need.